



CXOLAT OSCILLATOR

32.768 kHz

Ultra-Low Power/Fast Start-Up/Ultra-Miniature

DESCRIPTION

The CXOXLAT 32.768 kHz oscillator achieves the low power comparable with a tuning fork design and the fast start-up and tight frequency stability attained by an AT cut crystal design. Designed for applications requiring ultra-low current (15 μ A), fast start-up time (15 ms), and a tight frequency stability (± 30 ppm to ± 100 ppm) over a wide temperature range (-55°C to $+125^{\circ}\text{C}$). These oscillators are also capable of withstanding significantly higher shock than a standard tuning fork design.

FEATURES

- Ultra-low current (typical 15 μ A)
- Fast start-up (typical 15 ms)
- Tight tolerance
- High shock resistance
- Low aging
- CMOS output
- Optional Output Enable/Disable with Tri-State
- Hermetically sealed ceramic package
- Full military testing available
- Designed and manufactured in the USA

APPLICATIONS


Military, Aerospace & Avionics

- Communications
- Navigation
- GPS


Industrial, Computer & Communications

- Handheld instrumentation
- Transponder/Animal migration


SUGGESTED LAND PATTERN

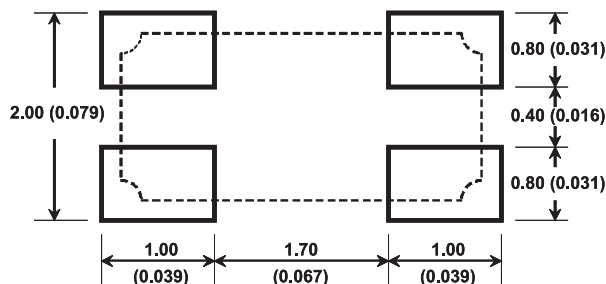

mm (inches)

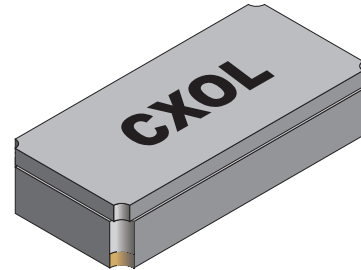

DIMENSIONS

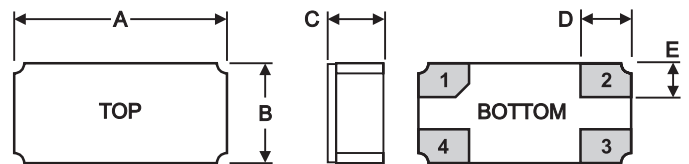

| DIM | TYPICAL | | MAXIMUM | |
|---------|---------|------|---------|------|
| | inches | mm | inches | mm |
| A | 0.126 | 3.20 | 0.130 | 3.30 |
| B | 0.059 | 1.50 | 0.063 | 1.60 |
| C (SM1) | 0.037 | 0.95 | 0.039 | 1.00 |
| D | 0.029 | 0.75 | 0.030 | 0.77 |
| E | 0.020 | 0.50 | 0.021 | 0.52 |

PIN CONNECTIONS

1. Output
2. Ground
3. Output Enable/Disable (E) or no connection (N)
4. V_{DD}



10217 Rev A



SPECIFICATIONS

Specifications are typical at 25°C unless otherwise noted. Specifications are subject to change without notice. Tighter specifications available (contact factory).

| | |
|---|---|
| Supply Voltage | 1.8 V to 3.3 V ±10% |
| Calibration Tolerance ¹ | ±25 ppm |
| Frequency Stability Over Temperature ² | ±10 to ±50 ppm for Commercial ±20 to ±100 ppm for Industrial ±50 to ±100 ppm for Military |
| Output Load (CMOS) | 15 pF |
| Aging, first year | 5 ppm |
| Shock | 5,000 g, 0.3 ms, ½ sine |
| Vibration ³ | 20 g, 10-2,000 Hz swept sine |
| Operating Temp. Range | -10°C to 70°C (Commercial) -40°C to 85°C (Industrial) -55°C to 125°C (Military) |

1. Other tolerances available.

2. Does not include calibration tolerance. Other tolerances available.

3. Per MIL-STD-202G, Method 204D, Condition D. Random vibration testing also available.

ELECTRICAL CHARACTERISTICS

CXOLAT 32.768 kHz

All parameters are measured at 25°C with a 10MΩ and 15pF load with V_{DD} 3.3 V.

| SYMBOL | PARAMETER | MIN | TYP | MAX | UNIT |
|----------------------|---------------------|--------------------|-----|--------------------|------|
| V _{OH} | Output Voltage High | 0.9V _{DD} | | | V |
| V _{OL} | Output Voltage Low | | | 0.1V _{DD} | V |
| t _{startup} | Start-up Time | | 15 | | ms |
| t _r | Rise Time (10%-90%) | | 2.8 | 10 | ns |
| t _f | Fall Time (10%-90%) | | 2.4 | 10 | ns |
| | Duty Cycle | 45 | 50 | 55 | % |
| I _{DD} | Current Consumption | | 15 | | μA |

ABSOLUTE MAXIMUM RATINGS

| | |
|--------------------------------|----------------------|
| Supply Voltage V _{DD} | -0.5 V to 5.0 V |
| Storage Temperature | -55°C to 125°C |
| Maximum Process Temperature | 260°C for 20 seconds |

ENABLE/DISABLE OPTIONS (E/N)

For the 32.768 kHz CXOLAT, Statek offers two enable/disable options: E and N. The E-version has a Tri-State output and stops oscillating internally when the output is put into the high Z state. The N-version does not have PIN 3 connected internally and so has no enable/disable capability. The following table summarizes the Enable/Disable option E.

ENABLE/DISABLE OPTION E FUNCTION TABLE


| | Enable (Pin 3 High*) | Disable (Pin 3 Low) |
|------------|----------------------|-----------------------|
| Output | Frequency Output | High Z State |
| Oscillator | Oscillates | Stops |
| Current | 15μA | Less than 1μA at 25°C |

*When PIN 1 is allowed to float, it is held high by an internal pull-up resistor.

PACKAGING OPTIONS

| | |
|--------|-------------------------------|
| CXOLAT | - Tray Pack |
| | - 12 mm tape, 7" or 13" reels |
| | (Per EIA 481) |

HOW TO ORDER CXOLAT 32.768 kHz SURFACE MOUNT CRYSTAL OSCILLATORS

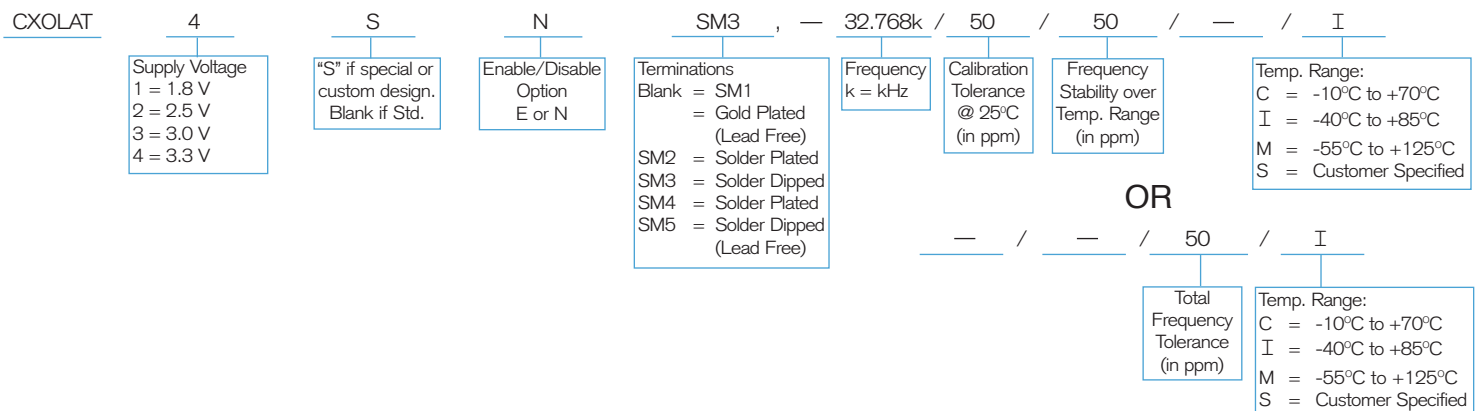

10217 Rev A